

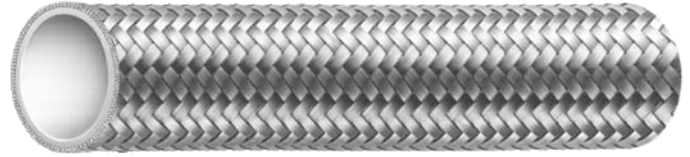
**INDUSTRIAL HOSE & FITTINGS****WEATHERHEAD TEFLON HOSE****H243 Teflon\* Hose**

**TYPICAL APPLICATION:** Hydraulic, air and steam lines. Particularly suited for air compressor discharge lines where vibration and high temperature are present.

**INNER TUBE:** Teflon.

**REINFORCEMENT:** Single stainless steel braid, 1" size. Double stainless steel braid (type 304).

**TEMPERATURE RANGE:** -65°F to +450°F (-54°C to +232°C).

**SPECIFICATIONS**

RB&H #	HOSE I.D. (IN.)	HOSE O.D. (IN.)	PSI W.P.	MIN. BURST PRES. (PSI.)	MIN. BEND RADIUS (IN.)	PWT. PER 100' (LBS.)	AVAILABLE LENGTHS (FT.)	HOSE ENDS (FT.)
H24304	1/4	23/64	3,000	12,000 9,600**	3	8	50, 100	1,653
H24305	5/16	27/64	2,500	10,000 8,000**	4	10	50, 100	145
H24306	3/8	1/2	2,000	8,000 6,000**	5	12	50, 100	1,290
H24308	1/2	41/64	1,750	7,000 5,500**	6 1/2	15	50, 100	3,716
H24312	3/4	57/64	1,000	4,000 3,500**	9	22	50	478
H24316	1	1 9/64	1,000	4,000 3,350**	12	49	50	288

\* Teflon is a registered trademark of DuPont

\*\* For applications above +300°F (+149°C)

**NOTE:** Not for use in applications requiring static dissipation

**WARNING:** For Teflon hose application, 'E' series fittings, must be used with H243 .030" thin wall hose only